

28W 1500MM ALNWICK INLINE T12 POULTRY TUBE LIGHT

SWITCHABLE COLOUR WITH DOUBLE ENDED 1M CABLE/SINGLE ENDED 0.5M DIFFUSED

50% SAVINGS
COMPARED TO
TRADITIONAL
LIGHTING


REDUCES
MORTALITY
BY 2%

IMPROVES
FOOD
CONSUMPTION
RATE BY 3%

0-100%
DIMMABLE
TO SIMULATE
SUNRISE AND
SUNSET

FLICKER
FREE 0Hz

5 YEAR
TOTAL
PRODUCT
WARRANTY

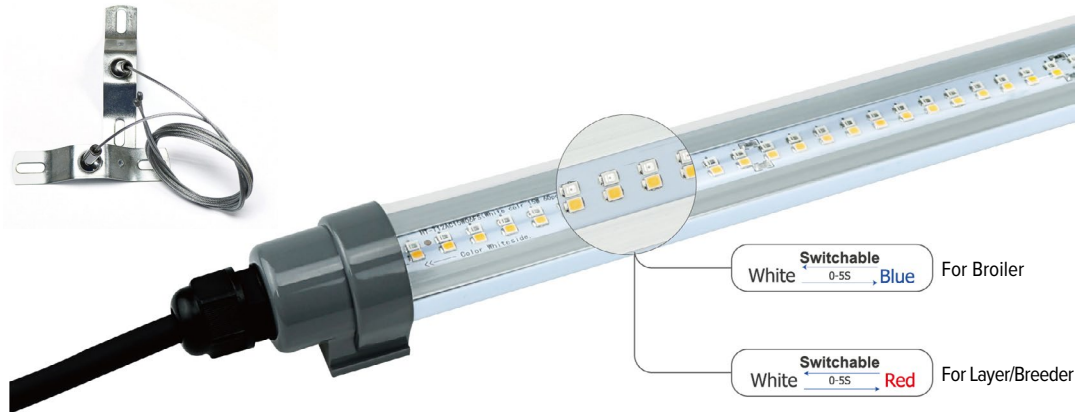

FEATURES AND BENEFITS

- CAN BE SWITCHED EITHER BETWEEN 5000K AND BLUE OR 2700K AND RED
- FLICKER FREE 0Hz REDUCES STRESS AND PECKING AND DECREASES SUSCEPTIBILITY TO DISEASE
- INCREASES MUSCULOSKELETAL DEVELOPMENT AND WEIGHT GAIN BY 5% (5000K/BLE)
- ENCOURAGES SEXUAL DEVELOPMENT (5000K/BLE)
- CONTROLS ONSET OF LAY AND OPTIMISES EGG PRODUCTION (2700K/RED)
- BLUE LIGHT IDEAL FOR LAIRAGE AND CALMING PRIOR TO CAPTURE
- RED LIGHT PARTICULARLY BENEFICIAL FOR THE PERSISTENCE OF LAY
- IP67 WATERPROOF, DUSTPROOF AND IMPACT RESISTANT

PRODUCT INFORMATION

Input: 180-240VAC
Output Current: 550mA
Product Size (mm): 1500L x 32D
Inrush Current: 6A
Flicker Free: (Hz): 0
Dimmable: 0-100%

PACKING INFORMATION

Weight (kg): 1 (GL7020, GL7022); 0.8 (GL7028, GL7030)

PRODUCT VARIATIONS

- GL7020** 28W 1500mm Alnwick T12 Inline Poultry Tube with double ended 1m cable (5000K/Blue) Diffused
GL7022 28W 1500mm Alnwick T12 Inline Poultry Tube with double ended 1m cable (2700K/Red) Diffused
GL7028 28W 1500mm Alnwick T12 Inline Poultry Tube with single ended 0.5m cable (5000K/Blue) Diffused
GL7030 28W 1500mm Alnwick T12 Inline Poultry Tube with single ended 0.5m cable (2700K/Red) Diffused




ADDITIONAL PRODUCTS

GL7039 3m Tube Suspension Kit (2pcs)



28W 1500MM ALNWICK INLINE T12 POULTRY TUBE LIGHT

SWITCHABLE COLOUR WITH DOUBLE ENDED 1M CABLE/SINGLE ENDED 0.5M DIFFUSED

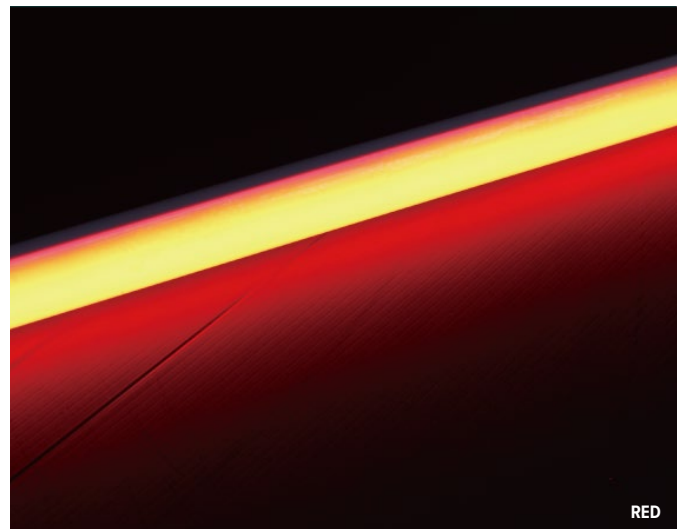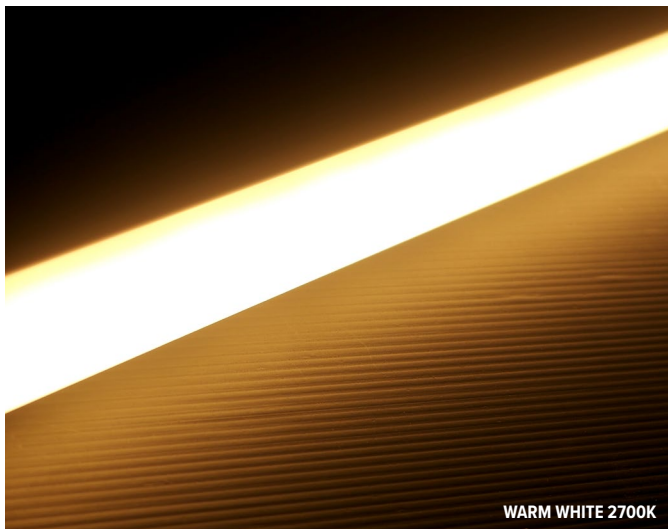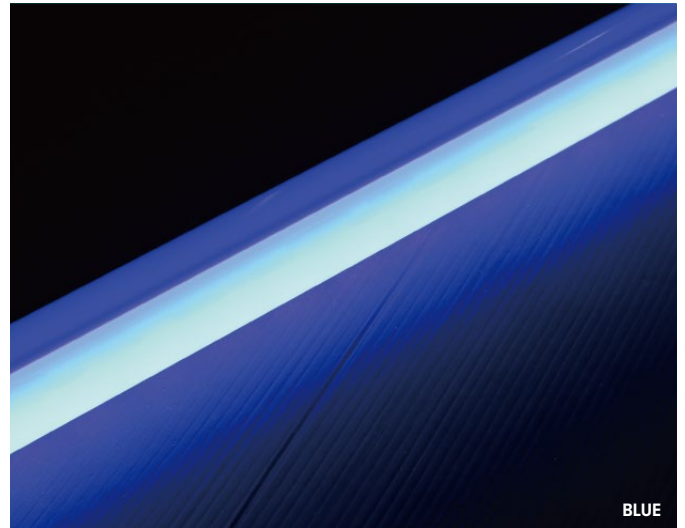


28W 1500MM ALNWICK INLINE T12 POULTRY TUBE LIGHT


SWITCHABLE COLOUR WITH DOUBLE ENDED 1M CABLE/SINGLE ENDED 0.5M DIFFUSED

SPECTRAL DISTRIBUTION DIAGRAM

5000K

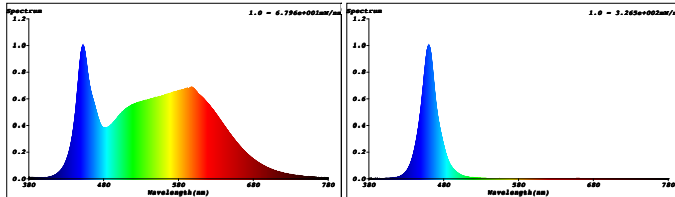


2700K

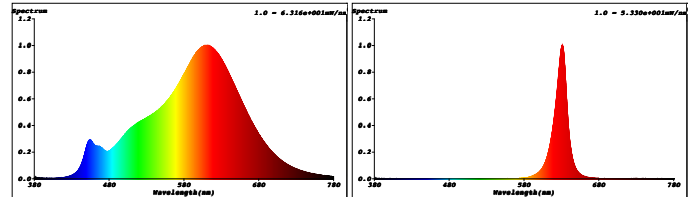


LUMINOUS INTENSITY DIAGRAM

5000K

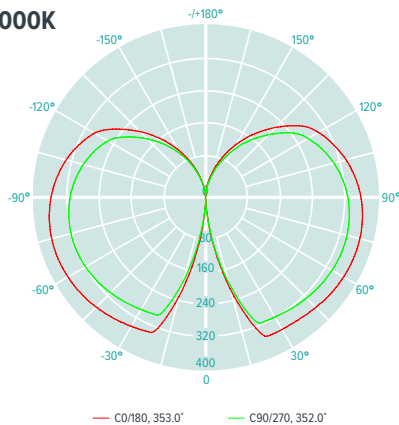


2700K

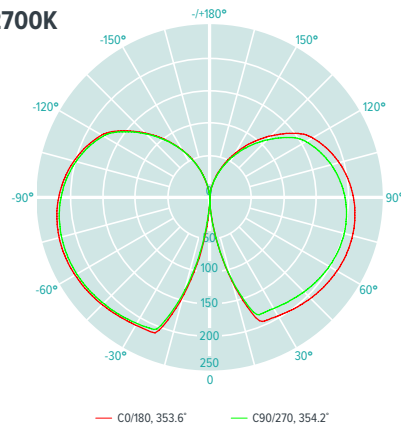


LUX LEVEL DIAGRAM

5000K

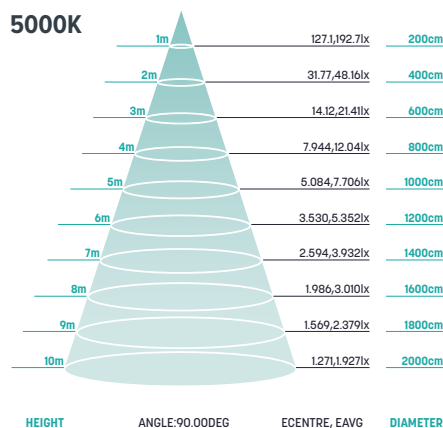

2700K

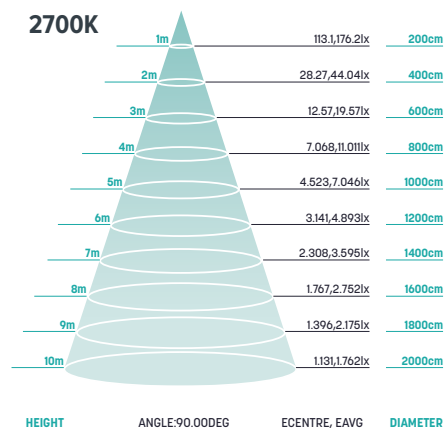

5 YEAR
TOTAL
PRODUCT
WARRANTY

